

梯形齿同步带

T5型
T10型



T5型
T10型

梯形齿同步带

代码	类型	齿距	材质		使用温度
			主体	芯线	
ECL01	T5	5.0	聚氨酯	钢丝	0~70°C
ECL02			橡胶	玻璃纤维线	-20~80°C
ECL21	T10	10.0	聚氨酯	钢丝	0~70°C
ECL22			橡胶	玻璃纤维线	-20~80°C

代码	齿距	H	h	L	单位重量g/m(宽度:10)
ECL01/ECL02	5	2.2	1.2	1.8	20.0
ECL21/ECL22	10	4.5	2.5	3.5	42.0

聚氨酯同步带随时间变化可能有颜色差异，对强度及使用性能无影响。

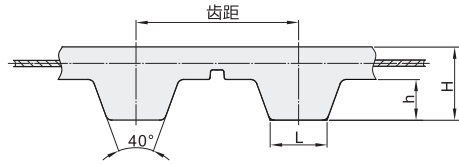

视角标准：第一视角

ECL21-T10(齿距:10)

型号	代码	皮带公称宽度	皮带周长	齿数	单价(元)					
					皮带公称宽度					
					150	200	250	300	400	500
150 (15mm)		400	40							
		450	45							
		500	50							
		530	53							
		550	55							
		560	56							
		600	60							
		630	63							
		650	65							
		700	70							
		720	72							
		750	75							
		800	80							
		850	85							
		900	90							
200 (20mm)		910	91							
		920	92							
		950	95							
		960	96							
250 (25mm)		980	98							
		1000	100							
		1050	105							
		1100	110							
400 (40mm)		1150	115							
		1200	120							
		1300	130							
		1320	132							
		1350	135							
		1400	140							
500 (50mm)		1450	145							
		1500	150							
		1600	160							
		1700	170							
		1750	175							
		1800	180							
		1880	188							

ECL22-T10(齿距:10)

型号	代码	皮带公称宽度	皮带周长	齿数	单价(元)					
					皮带公称宽度					
					150	200	250	300	400	500
150 (15mm)		340	34							
		400	40							
		410	41							
		440	44							
		460	46							
		480	48							
		500	50							
		560	56							
		570	57							
		600	60							
		630	63							
		650	65							
		660	66							
		690	69							
		700	70							
200 (20mm)		750	75							
		780	78							
		800	80							
		810	81							
250 (25mm)		840	84							
		870	87							
		880	88							
		890	89							
400 (40mm)		900	90							
		950	95							
		1000	100							
		1010	101							
		1050	105							
		1080	108							
500 (50mm)		1100	110							
		1110	111							
		1120	112							
		1140	114							
		1150	115							
		1200	120							
		1240	124							
		1280	128							
150 (15mm)		1300	130							
		1320	132							
		1350	135							
		1390	139							
		1400	140							
		1420	142							
		1460	146							
		1480	148							
		1500	150							
		1600	160							
		1630	163							
		1640	164							
		1780	178							
		1800	180							
		1880	188							
200 (20mm)		1980	198							
		2020	202							
		2250	225							
		2300	230							
		2380	238							
		2480	248							
		2500	250							
		2800	280							
		3000	300							
		3500	350							
		3800	380							
		4650	465							

ECL01-T5(齿距:5)

型号	代码	皮带公称宽度	皮带周长	齿数	单价(元)			
					皮带公称宽度			
					100	150	200	250
100 (10mm)		185	37					
		200	40					
		225	45					
		250	50					
		275	55					
		280	56					
		295	59					
		300	60					
		325	65					
		350	70					
		375	75					
		400	80					
		425	85					
		440	88					
		450	90					
150 (15mm)		475	95					
		500	100					
		525	105					
		550	110					
200 (20mm)		575	115					
		590	118					
		600	120					
		625	125					
250 (25mm)		630	126					
		650	130					
		675	135					
		690	138					
		700	140					
		725	145					
		750	150					
		780	156					
		800	160					
		850	170					
		900	180					
		1000	200					
		1075	215					
		1090	218					
		1100	220					
	1115	223						
	1215	243						
	1350	270						
	1440	288						

ECL02-T5(齿距:5)

型号	代码	皮带公称宽度	皮带周长	齿数	单价(元)			
					皮带公称宽度			
					100	150	200	250
100 (10mm)		165	33					
		185	37					
		220	44					
		240	48					
		245	49					
		250	50					
		260	52					
		270	54					
		280	56					
		300	60					
		310	62					
		320	64					
		325	65					
		330	66					
		340	68					
150 (15mm)		350	70					
		355	71					
		365	73					
		375	75					
200 (20mm)		390	78					
		400	80					
		420	84					
		435	87					
250 (25mm)		455	91					
		460	92					
		470	94					
		475	95					
		480	96					
		500	100					
		510	102					
		525	105					
		530	106					
		550	110					
		560	112					
		575	115					
		590	118					
		635	127					
		690	138					
	705	141						
	725	145						
	750	150						
	755	151						
	780	156						
	800	160						
	815	163						
	880	176						
	900	180						
	940	188						
	990	198						
	1000	200						
	1035	207						
	1100	220						
	1200	240						
	1215	243						
	1420	284						
	1630	326						
	1740	348						
	1905	381						
	1960	392						
	2000	400						

ECL01-T5(齿距:5)