


代码	类型	材质
VNW01	树脂直齿轮	蓝色尼龙(MC901)
VNW11		聚甲醛

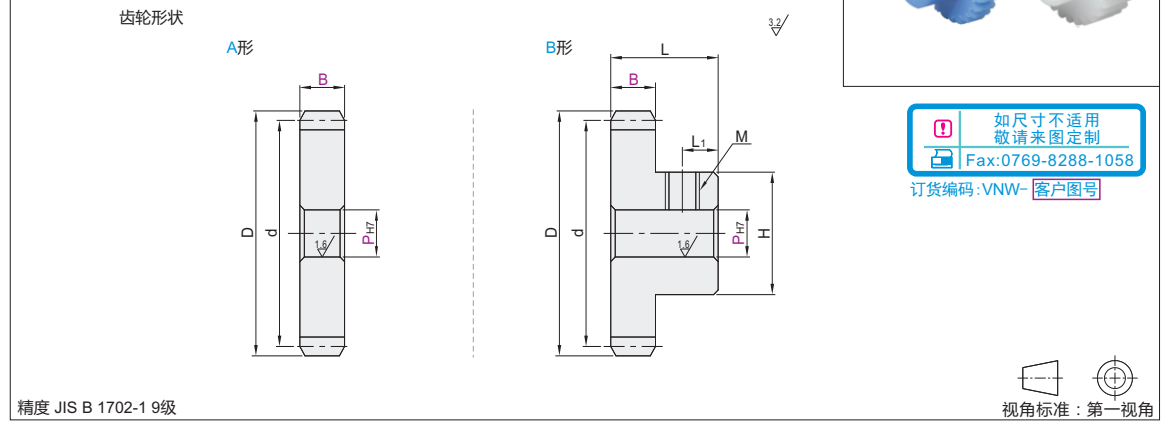

型号 代码	模数	齿数	B	齿轮 形状	内孔直径 P_{H7} 最小单位1	d	D	H	L	L ₁	M	容许传递力(N·m) 弯曲强度																			
												MC尼龙	聚甲醛																		
MC尼龙 VNW01 聚甲醛 VNW11	0.5	20	3	B	3~5	10	11	8.5	8	2.5	M3	0.04	0.16																		
		24				12	13					0.05	0.21																		
		25				12.5	13.5					0.05	0.22																		
		28				14	15					0.06	0.26																		
		30				15	16					0.07	0.30																		
		32				16	17					0.07	0.32																		
		36				18	19					0.09	0.37																		
		40				20	21					0.10	0.42																		
		45				22.5	23.5					0.12	0.50																		
		48				24	25					0.13	0.53																		
		50				25	26					0.14	0.57																		
		56				28	29					0.16	0.65																		
		60				30	31					0.17	0.71																		
		64				32	33					0.19	0.76																		
		70				35	36					0.21	0.84																		
		72				36	37					0.20	0.87																		
		80				40	41					0.23	0.97																		
		90				45	46					0.26	1.11																		
		100				50	51					0.30	1.25																		
		120				60	61					0.37	1.53																		
		MC尼龙 VNW01 聚甲醛 VNW11				0.8	16					5	B	4~7	12.8	14.4	10	3	M3	M3	0.13	0.56									
							18								14.4	16					0.16	0.65									
							20								16	17.6					0.18	0.77									
							24								19.2	20.8					0.24	0.97									
							25								20	21.6					0.25	1.02									
							28								22.4	24					0.29	1.18									
							30								24	25.6					0.32	1.27									
							32								25.6	27.2					0.34	1.40									
							36								28.8	30.4					0.40	1.63									
							40								32	33.6					0.45	1.87									
							45								38.4	37.6					0.53	2.16									
							48								36	40					0.58	2.34									
							50								40	41.6					0.61	2.47									
							56								44.8	46.4					0.70	2.83									
							60								48	49.6					0.76	3.10									
							64								51.2	52.8					0.83	3.31									
							70								56	57.6					0.90	3.64									
							72								57.6	59.2					0.93	3.76									
							80								64	65.6					1.06	4.22									
							90								72	73.6					1.20	4.81									
							100								80	81.6					1.36	5.41									
							120								96	97.6					1.65	6.56									
							MC尼龙 VNW01 聚甲醛 VNW11								1.0	18					10	A B	8~10	18	20	20	4	M4	M4	0.51	1.83
																20								20	22					0.60	2.11
																22								22	24					0.67	2.40
																24								24	26					0.76	2.67
																25								25	27					0.80	2.82
																26								26	28					0.84	2.97
																28								28	30					0.92	3.26
																30								30	32					1.01	3.54
																32								32	34					1.10	3.86
																35								35	37					1.23	4.33
																36								36	38					1.28	4.50
																40								40	42					1.46	5.13
																45								45	47					1.70	5.93
																48								48	50					1.84	6.43
																50								50	52					1.94	6.78
																55								55	57					2.18	7.61
																60								60	62					2.42	8.47
																70								70	72					2.86	10.00
																75								75	77					3.10	10.76
																80								80	82					3.30	11.57
																90								90	92					3.78	13.17
																100								100	102					4.25	14.82
																120								120	122					5.15	17.97

型号 代码	模数	齿数	B	齿轮 形状	内孔直径 P_{H7} 最小单位1	d	D	H	L	L ₁	M	容许传递力(N·m) 弯曲强度											
												MC尼龙	聚甲醛										
MC尼龙 VNW01 聚甲醛 VNW11	1.5	15	15	A B	8~12	22.5	25.5	18	24	4.5	M3	1.38	3.16										
		16				24	27					20	1.53	3.50									
		18				27	30					22	1.79	4.08									
		20				30	33					25	2.07	4.73									
		24				36	39					30	2.61	5.97									
		25				37.5	40.5						2.76	6.30									
		26				39	42					32	2.91	6.65									
		28				42	45					34	3.18	7.27									
		30				45	48					35	3.46	7.90									
		32				48	51						3.76	8.58									
		35				52.5	55.5					40	4.22	9.63									
		36				54	57						4.38	10.00									
		40				60	63						5.00	11.42									
		45				67.5	70.5					45	5.78	13.20									
		48				72	75						6.27	14.31									
		50				75	78						6.60	15.08									
		60				90	93					50	8.24	18.83									
		70				105	108						9.72	22.21									
		80				120	123					55	11.25	25.70									
		12				24	28					18	2.25	2.45									
		14				28	32					20	2.96	3.23									
		15				30	34					24	3.28	3.59									
		16				32	36					25	3.63	3.97									
		18				36	40					30	4.24	4.63									
		20				40	44					33	4.91	5.36									
		24				48	52					40	6.19	6.77									
		25				50	54					40	6.54	7.15									
		28				56	60					45	7.54	8.24									
		30				60	64					48	8.20	8.96									
		32				64	68						8.91	9.73									
		35				70	74					50	9.99	10.92									
		36				72	76						10.38	11.34									
		40				80	84						11.86	12.95									
		45				90	94						13.70	14.97									
		48				96	100					60	14.85	16.23									
		50				100	104						15.65	17.1									
		60				120	124						19.54	21.35									
		MC尼龙 VNW01 聚甲醛 VNW11				2.0	12					20	A B	10~16	30	35	23	34	7	M4	4.39		
							14								35	40					25	5.77	
							15								37.5	42.5					30	6.41	
							16								40	45					32	7.09	
							18								45	50					36	8.28	
							20								50	55					40	9.59	
							22								55	60					44	10.84	
							24								60	65					48	12.10	
							25								62.5	67.5					50	12.78	
							28								70	75					60	14.73	
							30								75	80					65	16.02	
							32								80	85						17.40	
							35								87.5	92.5						19.52	
							36								90	95						20.27	
							40								100	105					70	23.15	
							45								112.5	117.5						26.76	
							48								120	125						29.01	
							50								125	130						30.57	
							12								24	28					18	7.58	
							14								28	32					20	9.98	
							15								30	34					24	11.08	
							16								32	36					25	12.25	
							18								36	40					30	14.31	
							20								40	44					36	16.56	
							22								44	48					40	18.72	
							24								48	52					48	20.90	
							25								50	54					50	22.08	
							28								56	60					60	25.45	
							30								60	66					70	27.68	
							32								64	70					75	30.06	
							35								70	75					80	33.73	
							36								72	78						35.02	
							40								80	84						40.01	
							45								90	96						46.25	

请按图示订货

可选加工

优惠价
数量 1~9 10~
价格 100% 另行报价

交货期
5

未税价(元)

增加紧定螺钉

技术说明

在原紧定螺钉孔成90°位置再加工紧定螺钉孔。
A形不适用。

在原紧定螺钉孔成120°位置再加工紧定螺钉孔。
A形不适用。

① 模数0.5的齿数40~50按齿宽3mm计算。